


SILICON EPITAXIAL SCHOTTKY BARRIER DIODE

PINNING

PIN	DESCRIPTION			
1	Cathode			
2	Anode			

Applications

- Super-high speed switching circuit
- · Small current rectification

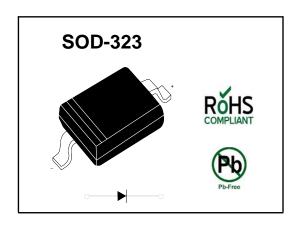

Absolute Maximum Ratings (T_a = 25 °C)

Absolute maximum rutings (1a = 25 °C)	T 6		
Parameter	Symbol	Value	Unit
Reverse Voltage	V_R	30	V
Peak Forward Current	I _{FM}	300	mA
Average Forward Current	I _{F(AV)}	200	mA
Non-repetitive Peak Forward Surge Current 1)	I _{FSM}	1	А
Junction Temperature	T _J	150	°C
Storage Temperature Range	T _{stg}	- 55 to + 150	°C

¹⁾ The peak-to-peak value in one cycle of 50 Hz sine-wave (non-repetitive)


Characteristics at T_a = 25 °C


Parameter	Symbol	Тур.	Max.	Unit
Forward Voltage at I _F = 200 mA	V _F	-	0.55	V
Reverse Current at V _R = 30 V	I _R	-	50	μΑ
Terminal Capacitance at f = 1 MHz	Ст	30	-	pF
Reverse Recovery Time at I_F = I_R = 100 mA, I_{rr} = 10 mA, R_L = 100 Ω	t _{rr}	3	-	ns


0755-23619906 www.jhgsz.com Rev.01 1 / 4





Typical Characteristics

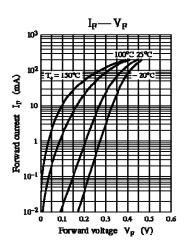










0755-23619906 www.jhgsz.com Rev.01 2 / 4




SOD-323 Tape and Reel


SOD-323 Embossed Carrier Tape

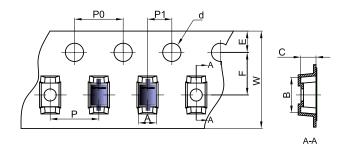

Dimensions are in millimeter										
Pkg type A B C d E F P0 P P1 V							W			
SOD-323	1.48	3.3	1.25	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

SOD-323 Tape Leader and Trailer

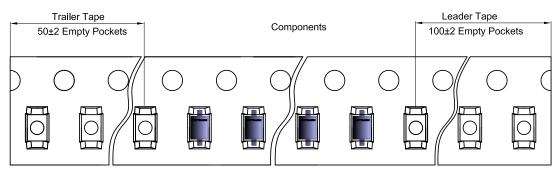

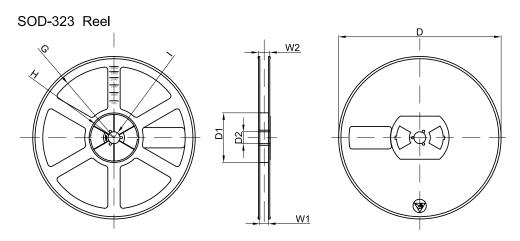


Dimensions are in millimeter								
Reel Option	D	D1	D2	G	Н	Į	W1	W2
7"D i a	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30


REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	45,000 pcs	203×203×195	180,000 pcs	438×438×220	

0755-23619906 www.jhgsz.com Rev.01 3 / 4



SOD-323 Package Outline Dimensions

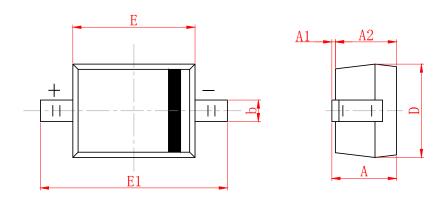

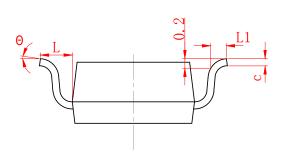

	MILLIMETER				
SYMBOL	MIN	MAX			
A		1.000			
A1	0.000	0. 100			
A2	0.800	0. 900			
b	0. 250	0. 350			
С	0.008	0. 150			
D	1. 200	1. 400			
Е	1.600	1.800			
E1	2. 500	2. 700			
L	0. 475 (REF)				
L1	0. 250	0.400			
θ	0°	8°			

DISCLAIMER

JHG PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with JHG products. You are solely responsible for (1)selecting the appropriate JHG products for your application;

(2)designing, validating and testing your application;

(3)ensuring your application meets applicable standards, and any other safety, security, or other requirements.

These resources are subject to change without notice. JHG grants you permission to use these resources only for development of an application that uses the JHG products described in the resource. Other reproduction and display of these resources are prohibited. No license is granted to any other JHG intellectual property right or to any third party intellectual property right. JHG disclaims responsibility for, and you will fully indemnify JHG and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

0755-23619906 www.jhgsz.com Rev.01 4 / 4